



# Explosionproof Batch Counter

## EL7320

**EL7320 is Upgraded.  
Modbus Communication and Temperature  
Correction are Now Available.**

Easy-to-read display

Easy selection  
from 6 batch  
settings

Alarm  
notification  
buzzer

Large pushbuttons for  
superior operability

Separate pushbuttons for setting  
and operation to prevent mistakes




## ■ GENERAL SPECIFICATIONS


Item	Description		
Type of operation	Pulse addition		
Display	Total count	7-segment LED 6-digit	(Red 25.4mm)
	Batch setting	7-segment LED 6-digit	(Red 14mm)
	Channel number	7-segment LED 2-digit	(Red 14mm)
	Operation indicator	LEDs	
Buttons	Channel select	Explosionproof cam switch with 6 notches	
	Pushbutton	φ30 explosionproof pushbuttons	
Buzzer	φ50 explosionproof buzzer for alarm		
Power source	100/110VAC or 200/220VAC 50/60Hz (Allowable voltage: within ±10% of rated voltage)		
Ambient temperature	-20 to +50°C		
Configuration	Explosionproof rating: Flameproof Ex d IIB T4		
Installation	Wall-mount or Stanchion		
Housing material	Aluminum casting (Stanchion: steel)		
Outline dimensions	300 (W) ×360 (H) ×247 (D) (batch counter body only)		
Weight	Approx. 20ka (batch counter body only)		

※: For detailed specifications, please refer to the general specification sheet.

## ■ EXPLOSIONPROOF BATCH COUNTER EL7320 SYSTEM STRUCTURE DIAGRAM

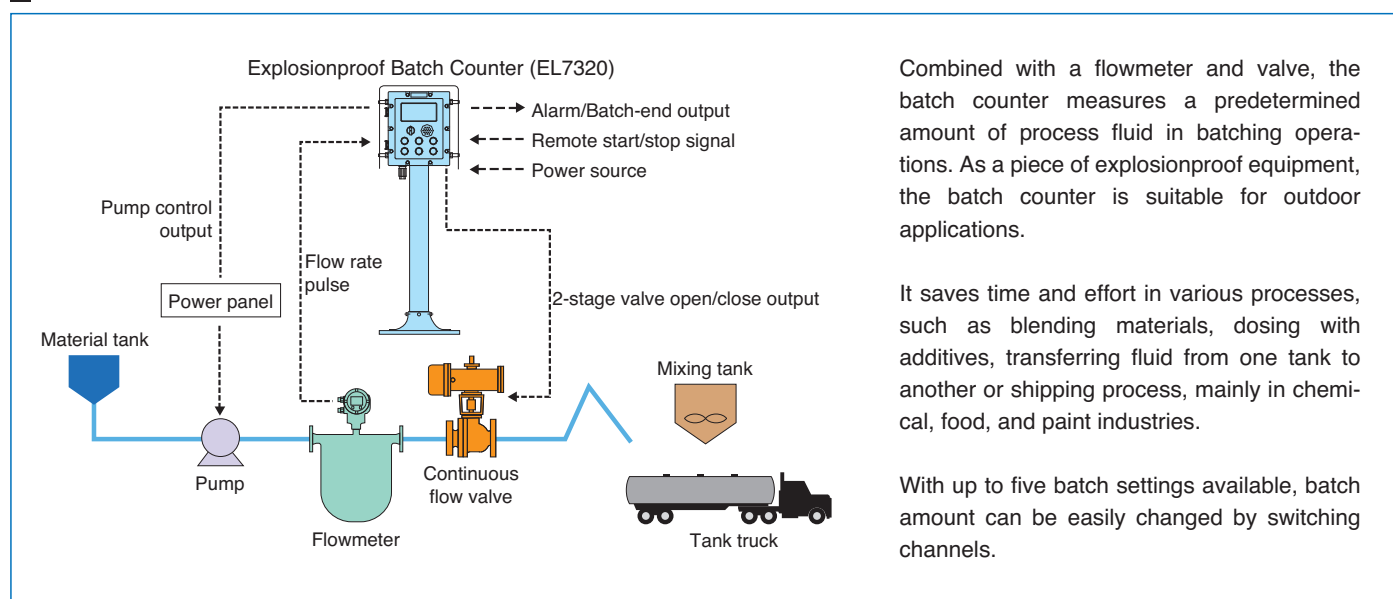

## ■ OUTLINE DIMENSIONS

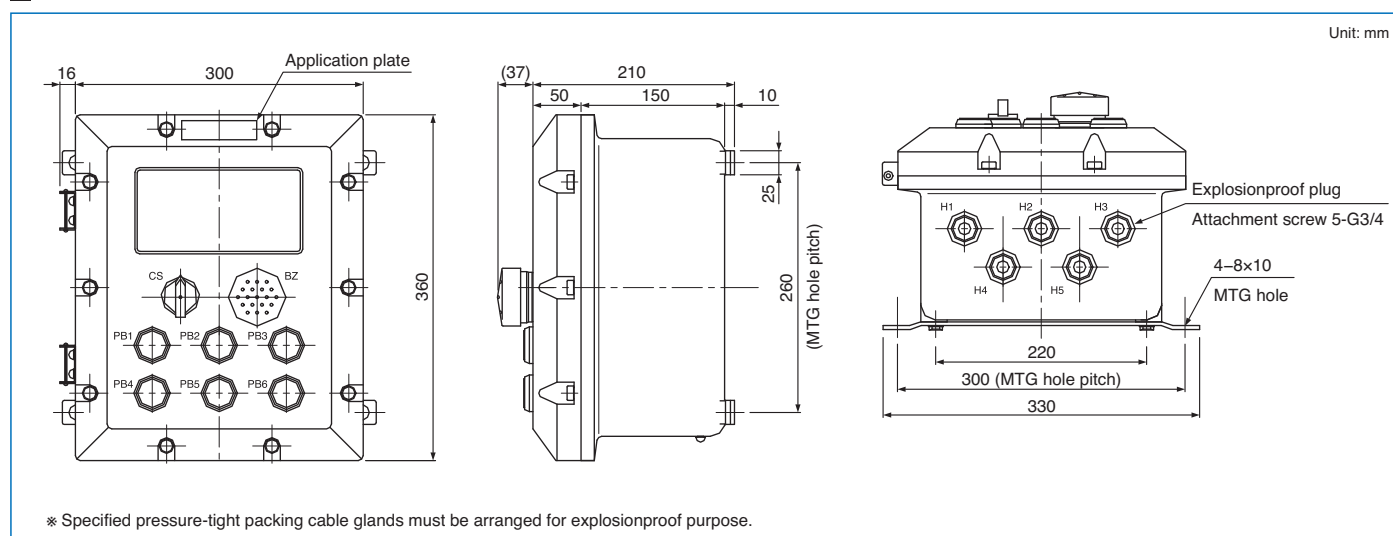

The specification as of February, 2022 is stated in this catalog. Specifications and design are subject to change without notice.



**OVAL Corporation**

3-10-8 Kamiuchiai, Shinjuku-ku, Tokyo 161-8508  
Phone: +81 3-3360-5121 FAX: +81 3-3365-8605

<https://www.oval.co.jp/english>

